

4" CENTERSET LAV FAUCET INSTALLATION SHEET

It is recommended that only licensed plumbers with knowledge of installing decorative plumbing products be employed to install Legacy Brass products. Failure to do so may cause product malfunction and needless additional cost.

INSTALLER NOTICE: Do not use plumbers' putty to install this product. The use of plumbers' putty will void the homeowner's finish warranty. We recommend using a clear silicone sealant and teflon tape around threaded parts.

1) Insert the faucet set into the holes of the deck, bowl or pedestal sink. NOTE: There should be three (3) holes, each 1 1/4" in diameter.

2) Use the washers and nuts provided to tighten the faucet to the fixture or deck. (The nuts may be a washer/nut combination).

3) Connect the water supply hoses (not provided) to the "Hot" (left side) and "Cold" (right side) nipples of the faucet.

4) Install the drain by:

a) removing the flange, washers and nut from drain assembly, applying a sealant to the underside of the flange and inserting it into the drain hole of the sink.




b) installing and tightening the washers and nut from the underside and then screwing the body onto the flange, so that the ball rod outlet faces directly toward the back wall.

c) inserting the ball rod into its outlet and inserting the drain plug into the flange, aligning it with the ball rod. Tighten the nut on the ball rod outlet.

d) connecting the ball rod to the pop-up rod using the strap and the V-clip.

5) Check for leaks at the faucet and drain connections and tighten as necessary.

6) With the valves in the "OFF" position, reset the handles in the desired position and tighten the handle set screws.

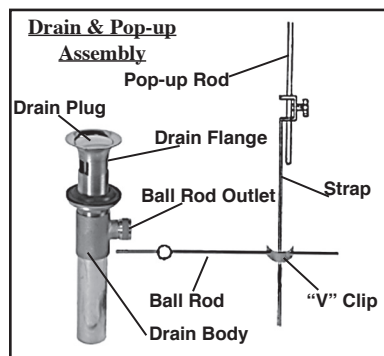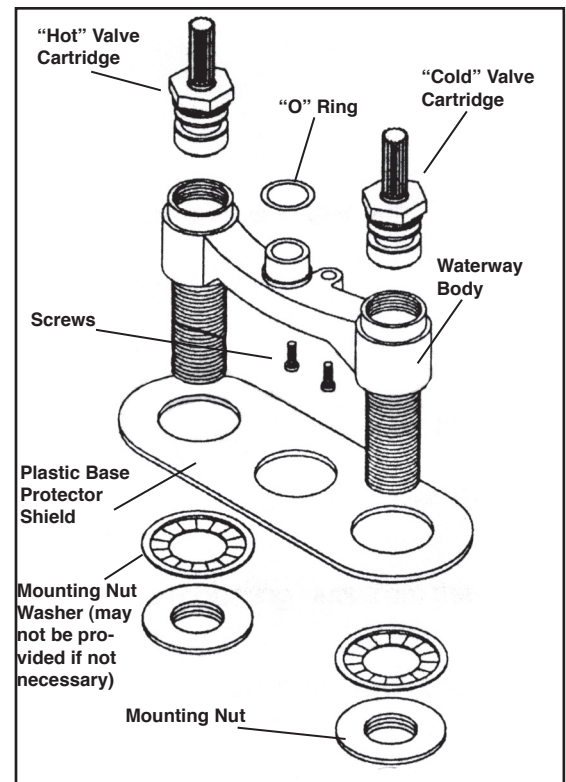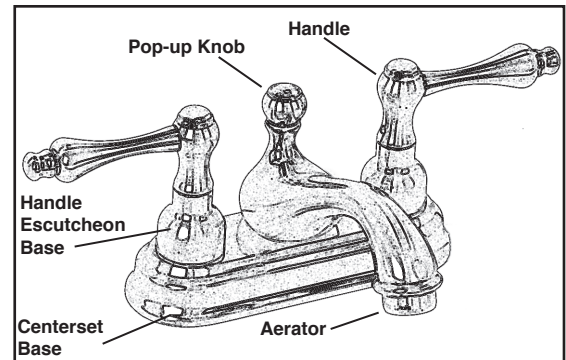

INSTALLER
Important Cleaning Notice

Please refer to *Care & Maintenance Instructions* for complete cleaning instructions. **Never clean with abrasives, acids or detergents.** Wipe with soft, damp cloth.