

Legacy Brass, Inc

IN-WALL SHUTOFF (VOLUME CONTROL) & DIVERTER VALVES INSTALLATION SHEET


It is recommended that only licensed plumbers with knowledge of installing decorative plumbing products be employed to install Legacy Brass products. Failure to do so may cause product malfunction and needless additional cost.

INSTALLER NOTICE: Do not use plumbers' putty to install this product. The use of plumbers' putty will void the homeowner's finish warranty. We recommend using a clear silicone sealant and teflon tape around threaded parts.

1) All Shut-off Valves and in-wall Diverter Valves should be plumbed in line with the operating valve, whether it be Thermostatic, Pressure Balanced or a 2- or 3-Valve rough.

2) It is important to install the valve with the water flow direction as indicated on the valve body. **It will malfunction if not installed correctly.**

3) The stems and allthreads of the Shut-off and Diverter Valves can be cut to proper heights when the trim is installed. The top of the allthread is normally 1/2" below the top of the stem. The chart below indicates the distance from the finished wall to the top of the stem.

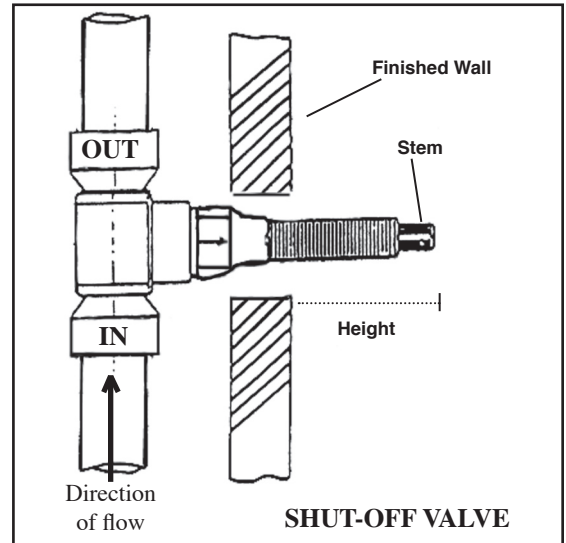

INSTALLER
Important Cleaning Notice

Please refer to *Care & Maintenance Instructions* for complete cleaning instructions. **Never clean with abrasives, acids or detergents.** Wipe with soft, damp cloth.

DIMENSION GUIDE									
Series	Height	Series	Height	Series	Height	Series	Height	Series	Height
1015,16	2 1/4"	2215,16	2"	3115,16	2 1/4"	3915,16	2 1/4"	4665,66	1 7/8"
1115,16	2 1/4"	2215,16	2 1/2"	3165,66	2 1/2"	3965,66	2 1/4"	4715,16	2 1/4"
1215,16	2 1/4"	2315,16	2"	3215,16	2 1/4"	4015,16	2 1/8"	4815,16	2 5/8"
1315,16	2 5/8"	2365,66	2 1/2"	3265,66	2 1/2"	4065,66	2 1/8"	4865,66	2 5/8"
1365,66	2 1/2"	2415,16	2 5/8"	3315,16	2 1/4"	4115,16	2 1/4"	4915,16	2 5/8"
1415,16	2 5/8"	2515,16	2 5/8"	3415,16	2 1/2"	4165,66	2 1/4"	4965,66	2 5/8"
1465,66	2 1/2"	2615,16	2 5/8"	3465,66	2 1/2"	4215,16	2 1/2"	5015,16	2 1/2"
1515,16	2 5/8"	2715,16	2 1/4"	3515,16	2"	4265,66	2 1/2"	5065,66	2 1/2"
1615,16	2 5/8"	2765,66	2 1/4"	3565,66	2"	4315,16	2 1/2"	5115,16	2 5/8"
1715,16	2 5/8"	2815,16	2 1/4"	3615,16	2 1/4"	4415,16	2 1/2"	5165,66	2 1/4"
1815,16	2 5/8"	2865,66	2 1/4"	3665,66	2 1/4"	4465,66	2 1/2"		
1915,16	2 5/8"	2915,16	2 1/4"	3715,16	2 1/2"	4515,16	2 1/4"		
2015,16	2 5/8"	2965,66	2 1/4"	3815,16	2 1/2"	4565,66	2 5/8"		
2115,16	2 5/8"	3015,16	1 7/8"	3865,66	2 1/2"	4615,16	1 7/8"		

