


## BAR FAUCET INSTALLATION SHEET

*It is recommended that only licensed plumbers with knowledge of installing decorative plumbing products be employed to install Legacy Brass products. Failure to do so may cause product malfunction and needless additional cost.*

**INSTALLER NOTICE:** Do not use plumbers' putty to install this product. The use of plumbers' putty will void the homeowner's finish warranty. We recommend using a clear silicone sealant and teflon tape around threaded parts.

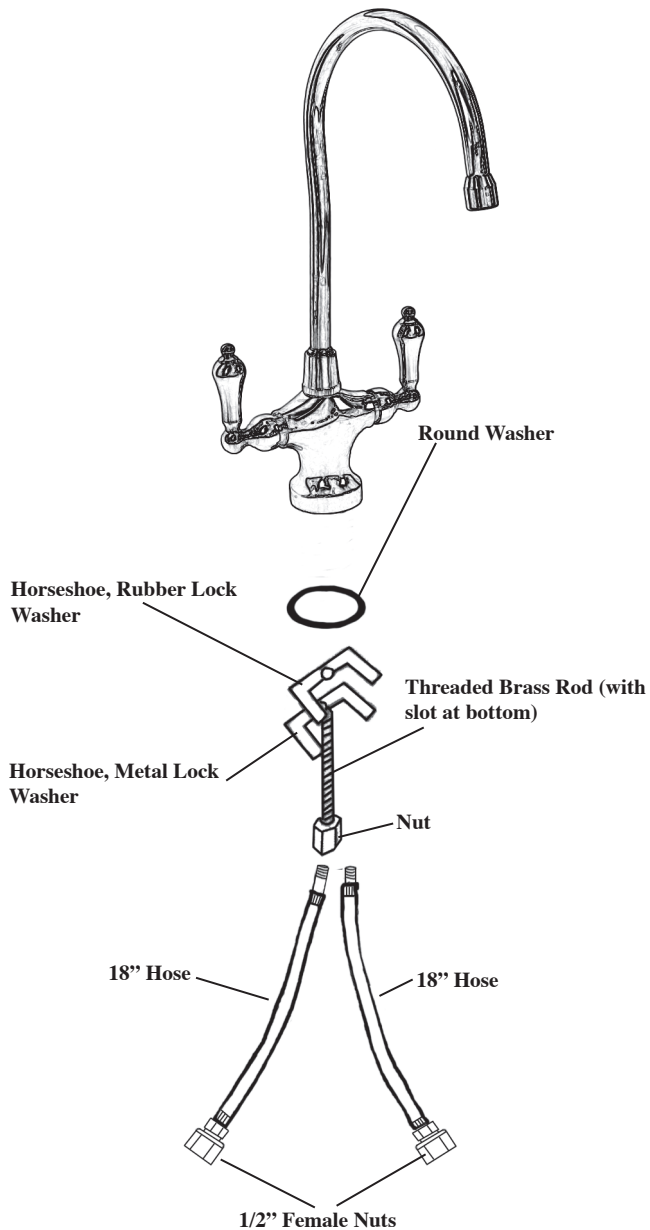

Bar Faucets are supplied with the hoses already installed in the faucet. **DO NOT** remove the hoses unless absolutely necessary.

- 1) Remove the threaded rod, the nut, the washers and the horseshoe-shaped parts from the bag attached to the hoses.
- 2) Screw the threaded rod into the bottom of the spout with the slotted end at the bottom.
- 3) Install the faucet into the 1 1/4" diameter hole from the top with the round washer between the spout base and the deck.
- 4) Slide the horseshoe washers onto the threaded rod and tighten the nut until the bar faucet is tight against the deck.
- 5) Connect the hoses to the supply valves; COLD on the right and HOT on the left.
- 6) Set the handles according to individual preferences and tighten the set screws.

### **INSTALLER**

#### **Important Cleaning Notice**

Please refer to *Care & Maintenance Instructions* for complete cleaning instructions. **Never clean with abrasives, acids or detergents.** Wipe with soft, damp cloth.