


Legacy Brass, Inc


TENSION BAR FOR PRESSURE BALANCED VALVES INSTALLATION SHEET

It is recommended that only licensed plumbers with knowledge of installing decorative plumbing products be employed to install Legacy Brass products. Failure to do so may cause product malfunction and needless additional cost.

INSTALLER NOTICE: Do not use plumbers' putty to install this product. The use of plumbers' putty will void the homeowner's finish warranty. We recommend using a clear silicone sealant and teflon tape around threaded parts.

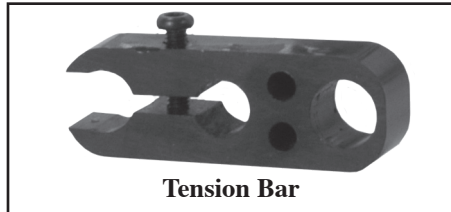

The tension bar for Pressure Balanced Valves is designed to be used with lever handles. Round handles, tee handles and cross handles do not require this tension bar.

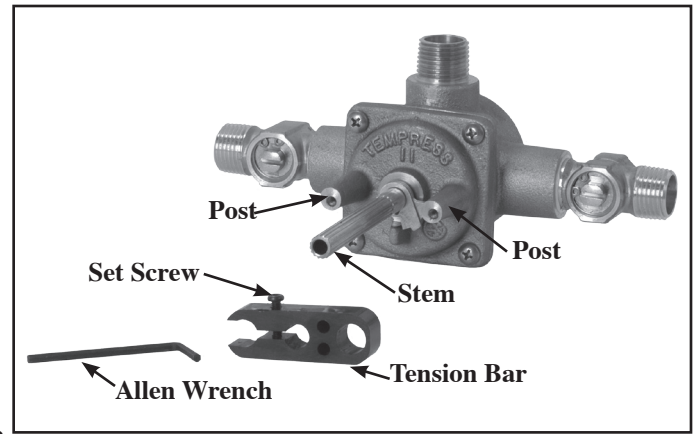

- 1) Place the tension bar over the stem and the posts of the valve by sliding it down the stem.
- 2) Adjust the tension by tightening the set screw using the allen wrench provided.
- 3) Test the tension by using the trim lever handle. Slip it onto the stem and turn the stem counterclockwise. This should require a slight pressure. Adjust the set screw as necessary.
- 4) Do not create too much tension. Too much tension will make the valve difficult to operate.

