


EXTENDED SINGLE HOLE FAUCET INSTALLATION SHEET


It is recommended that only licensed plumbers with knowledge of installing decorative plumbing products be employed to install Legacy Brass products. Failure to do so may cause product malfunction and needless additional cost.

INSTALLER NOTICE: Do not use plumbers' putty to install this product. The use of plumbers' putty will void the homeowner's finish warranty. We recommend using a clear silicone sealant and teflon tape around threaded parts.

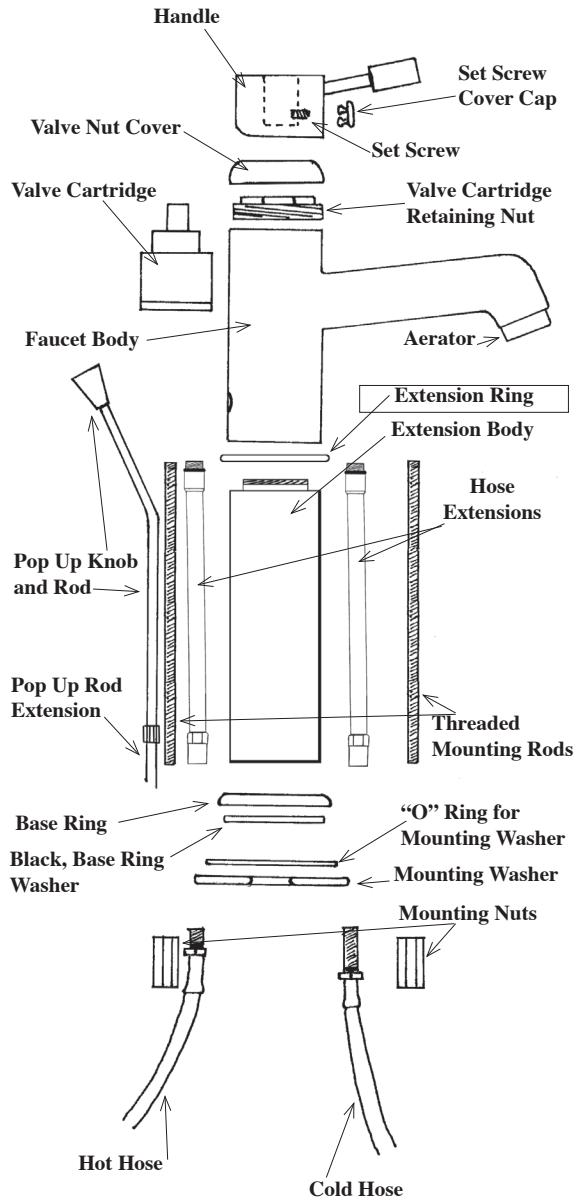

Single Hole Faucets are supplied with the hoses and threaded rods already installed into the faucet. **DO NOT** remove them unless absolutely necessary.

- 1) Remove the nuts, the "O" Ring and the mounting washer parts from the bag in the box.
- 2) Install the faucet into the 1 1/4" diameter hole from the top with the base ring and its gasket between the spout base and the deck.
- 3) Slide the installation bracket onto the threaded rods and tighten the nuts until the faucet is tight against the deck.
- 4) Insert the pop-up rod through the hole in the back of the spout.
- 5) Connect the hoses to the supply valves; COLD on the right and HOT on the left.
- 6) Install the pop-up drain assembly by:
 - a) removing the flange, washers and nut from the drain assembly, applying sealant to the underside of the flange and inserting it in the drain hole of the sink.
 - b) installing and tightening the washers and nut from the underside and then screwing the body onto the flange, so that the ball rod outlet faces directly toward the back.
 - c) inserting the drain plug into the flange and aligning it with the ball rod and tightening the nut on the ball rod outlet.
 - d) connecting the ball rod to the pop-up rod using the strap and V-clip.

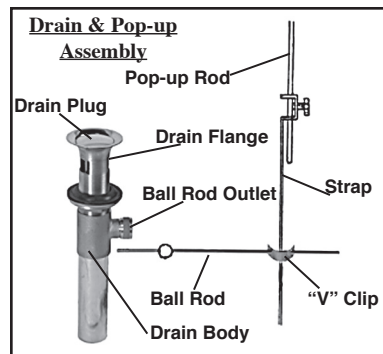

INSTALLER
Important Cleaning Notice

Please refer to *Care & Maintenance Instructions* for complete cleaning instructions. **Never clean with abrasives, acids or detergents.** Wipe with soft, damp cloth.